


461, 464, 468, 470

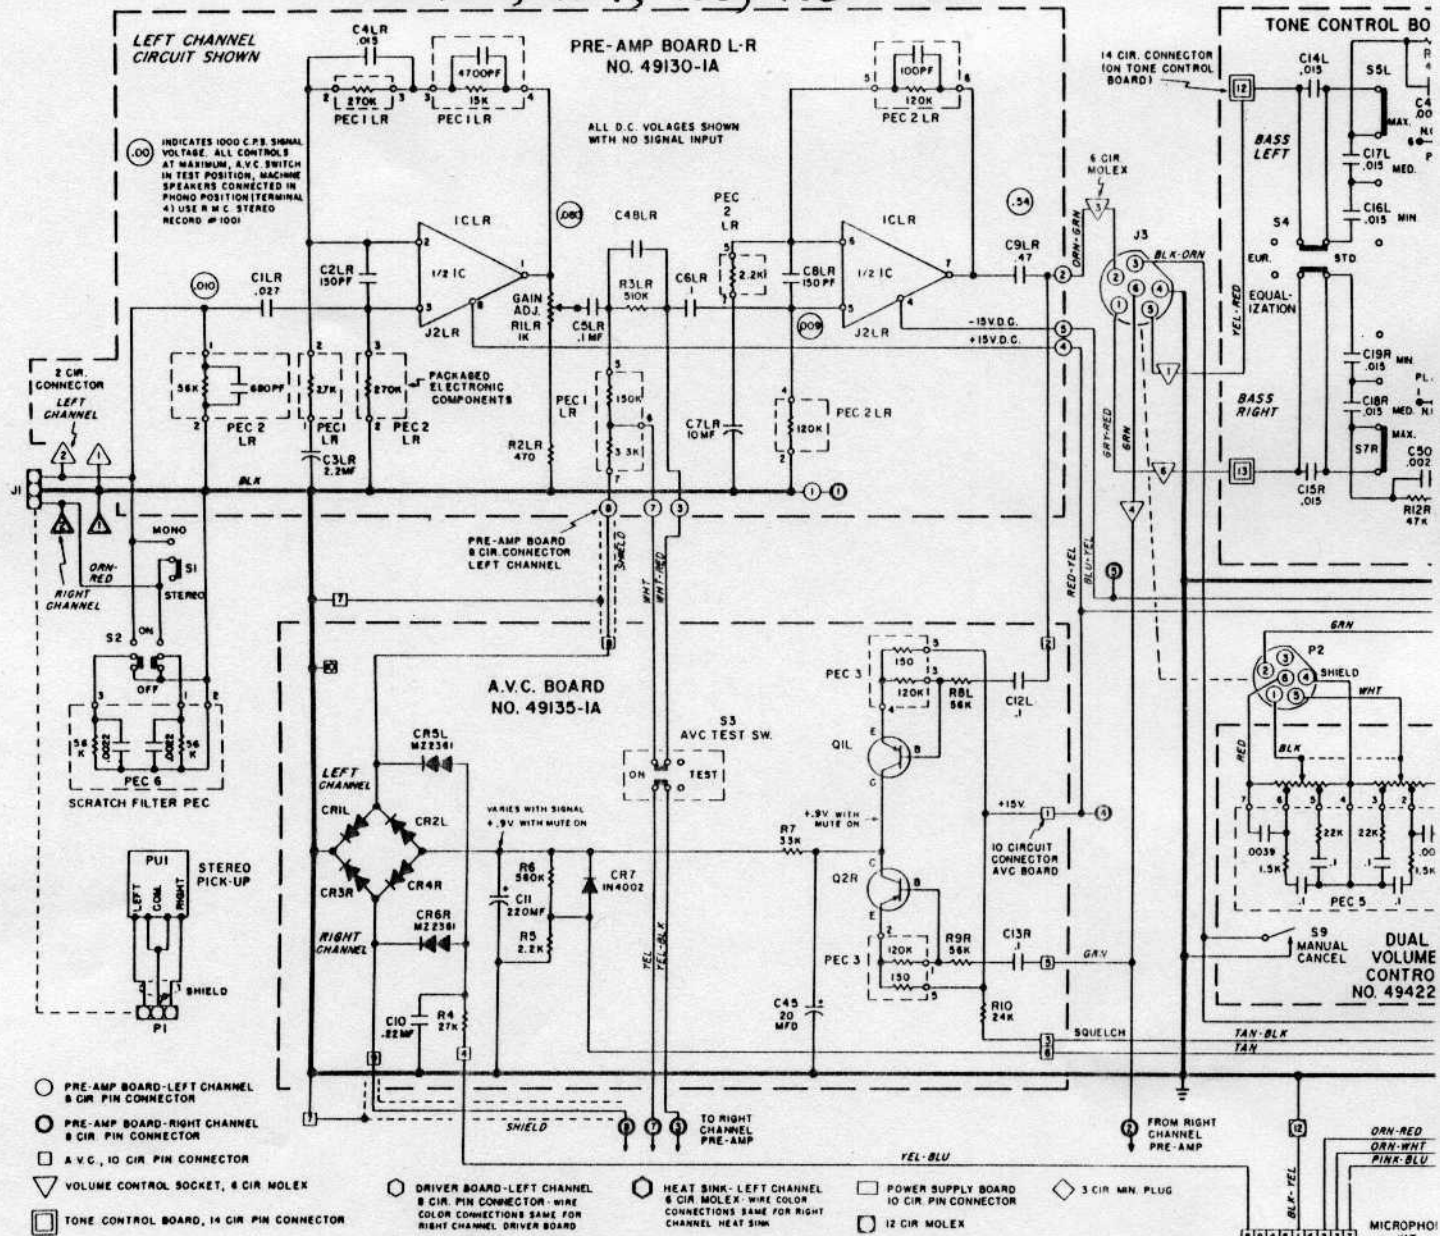

**SERVICE AND REPLACEMENT OF COMPONENTS**

If trouble should occur that cannot be corrected in the field, the defective unit should be checked with a D.C. V.T.V.M., A.C. V.T.V.M., oscilloscope and audio generator.

All voltages shown on the schematic are with 120 A.C. volt line.

Note: All D.C. voltages are measured with respect to chassis ground. The amplifier power is supplied thru the amplifier cable (red plug).

Model 461  
(464, 468, 470 have different distribution panel)

