

PRELIMINARY

XENOPHOBE VIDEO GAME 3 PLAYER UPRIGHT

OPTION 3: ALTERNATE POWER CHASSIS WITH ADAPTOR CABLE

Information Supplement

Bally
MIDWAY·SENTE

10601 W. Belmont Avenue
Franklin Park, Illinois 60131
U.S.A.

Phone: (312) 451-9200 Fax No.: 312-451-4150
Cable Address: MIDCO Telex No.: 72-1596

WARNING

THIS GAME MUST BE GROUNDED. FAILURE TO DO SO MAY RESULT IN DESTRUCTION TO ELECTRONIC COMPONENTS.

WARNING: This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a CLASS A computing device pursuant to SUBPART J of PART 15 of FCC RULES, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference

ELECTRICAL BULLETIN: FOR ALL APPARATUS COVERED BY THE CANADIAN STANDARDS ASSOCIATION (CSA) STANDARD C22.2 NO. 1, WHICH EMPLOYS A SUPPLY CORD TERMINATED WITH A POLARIZED 2-PRONG ATTACHMENT PLUG

CAUTION: TO PREVENT ELECTRIC SHOCK DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.

ATTENTION: POUR PREVENIR CHOCS ELECTRIQUES NE PAS UTILISER CETTE FICHE POLARISEE AVEC UN PROLONGATEUR, UNE PRISE DE COURANT OU UNE AUTRE SORTIE DE COURANT, SAUF SI LES LAMES PEUVENT ETRE INSEREES A FOND SANS EN LAISSER AUCUNE PARTIE A DECOUVERT.

**USE ONLY GENUINE BALLY MIDWAY
APPROVED REPLACEMENT PARTS.**

©COPYRIGHT MCMLXXXVII BY BALLY MIDWAY MFG. CO. ALL RIGHTS RESERVED.

NO PART OF THIS PUBLICATION MAY BE REPRODUCED BY ANY MECHANICAL, PHOTOGRAPHIC, OR ELECTRONIC PROCESS, OR IN THE FORM OF A PHONOGRAPHIC RECORDING, NOR MAY IT BE TRANSMITTED, OR OTHERWISE COPIED FOR PUBLIC OR PRIVATE USE, WITHOUT PERMISSION FROM THE PUBLISHER. THIS MANUAL IS FOR SERVICE USE ONLY, AND NOT FOR GENERAL DISTRIBUTION. FOR PERMISSION REQUESTS, WRITE: BALLY MIDWAY MFG. CO., 10601 W. BELMONT AVE., FRANKLIN PARK, IL 60131.

Your XENOPHOB video game is equipped with an alternate POWER CHASSIS WITH ADAPTOR CABLE ASSEMBLY. Additional parts are used to make the necessary cabling connections to the rest of the game.

TABLE OF CONTENTS

DESCRIPTION	PAGE
Introduction	1
Lower Rear Cabinet Upper Portion Illustration	2
Lower Rear Cabinet Upper Portion Parts List	3
Lower Rear Cabinet Lower Portion Illustration	4
Lower Rear Cabinet Lower Portion Parts List	5
Power Chassis Assembly - Illustration	6
Power Chassis Assembly - Parts List	7
Farnell Power Supply, Power Chassis & Adaptor Cable Wiring Diagram.....	8
Appendix	9
Farnell Power Supply - Component Layout	A1
Farnell Power Supply - Parts List	A2
Farnell Power Supply - Schematic	A3

INTRODUCTION


Your XENOPHOBE video game is equipped with an alternate POWER CHASSIS WITH ADAPTOR CABLE ASSEMBLY. Additional adaptor cables are used to make the necessary cabling connections to the rest of the game.

Please disregard pages 2-10, 2-11, 2-16 & 2-17 of SECTION 2 - ILLUSTRATED PARTS BREAKDOWN SECTION in your XENOPHOBE video game parts & operating manual (OE85-00300-0000). Refer instead to pages 2 through 7 in this information supplement.

The information shown in the FARNELL POWER SUPPLY, POWER CHASSIS ASSEMBLY & ADAPTOR CABLE WIRING DIAGRAM (M051-00945-A094), located on page 8 of this information supplement, replaces the corresponding information shown on page 3-2 of SECTION 3 - COMPONENT LAYOUTS, SCHEMATICS & WIRING DIAGRAM in your XENOPHOBE game parts & operating manual (OE85-00300-0000).

Please disregard page 3-21 of SECTION 3 - COMPONENT LAYOUTS, SCHEMATICS & WIRING DIAGRAM in your XENOPHOBE Video Game Parts & Operating Manual (OE85-00300-0000). Refer instead to pages A1 through A3 in this information supplement.

LOWER REAR CABINET (UPPER PORTION)

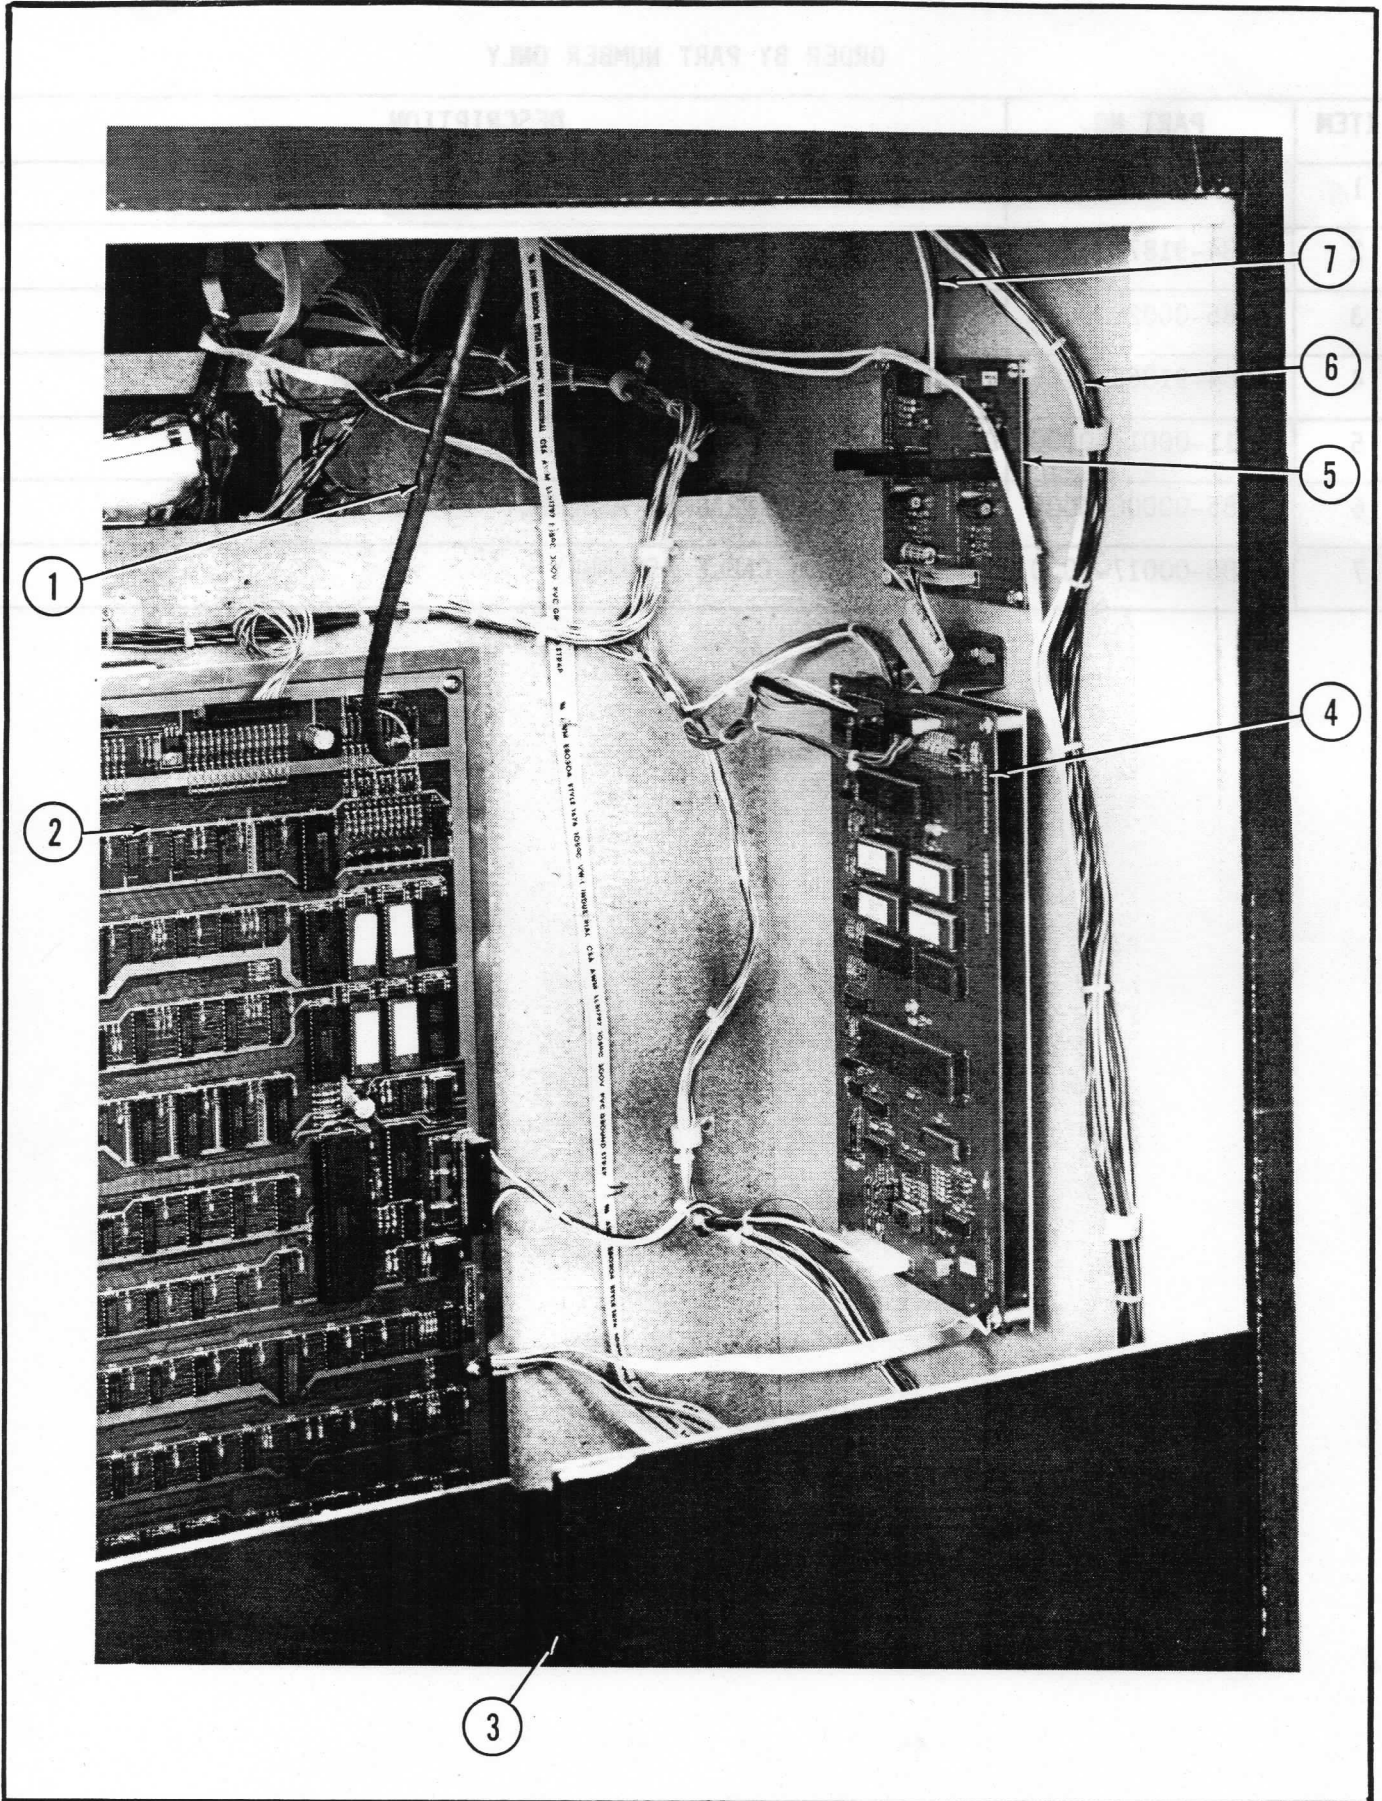


E85-OPT3-LRCUP


LOWER REAR CABINET (UPPER PORTION) PARTS LIST

ORDER BY PART NUMBER ONLY

ITEM	PART NO.	DESCRIPTION
1	AE85-00018-0000	MONITOR/VIDEO CABLE ASSEMBLY
2	A084-91871-AE85	PROGRAMMED 68000 VIDEO P.C. BOARD ASSEMBLY
3	A385-00023-0000	LINE CORD ASSEMBLY - U.S.A.
4	A084-91863-AE85	PROGRAMMED SOUNDS GOOD P.C. BOARD ASSEMBLY
5	AA11-00017-0000	DUAL POWER AMP W/SPACERS
6	AE85-00006-0000	MASTER CABLE W/BRACKET ASSEMBLY
7	AE85-00017-0000	SPEAKER/AUDIO CABLE ASSEMBLY

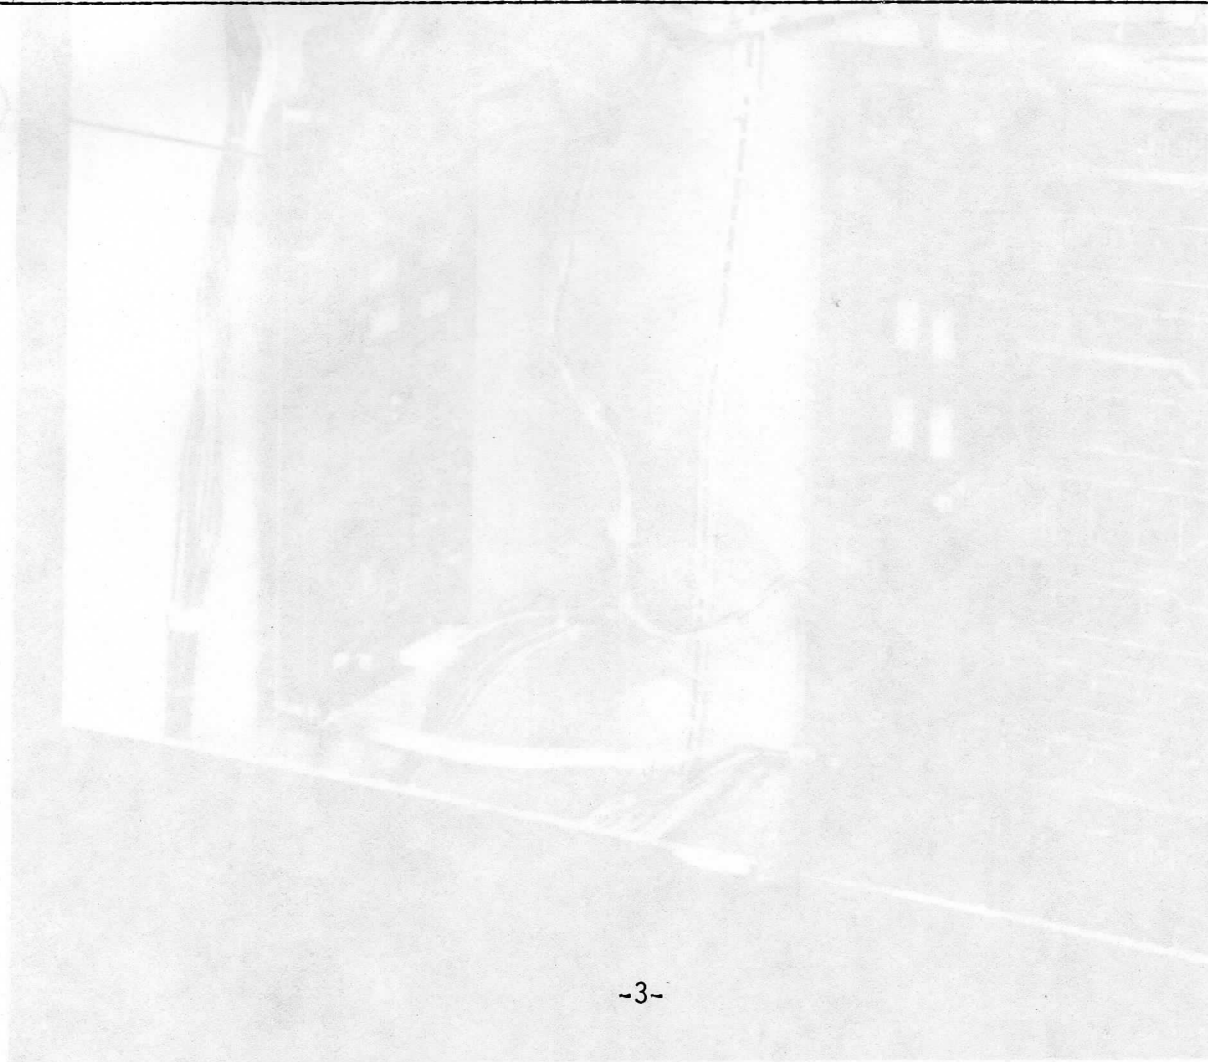

LOWER REAR CABINET (LOWER PORTION)

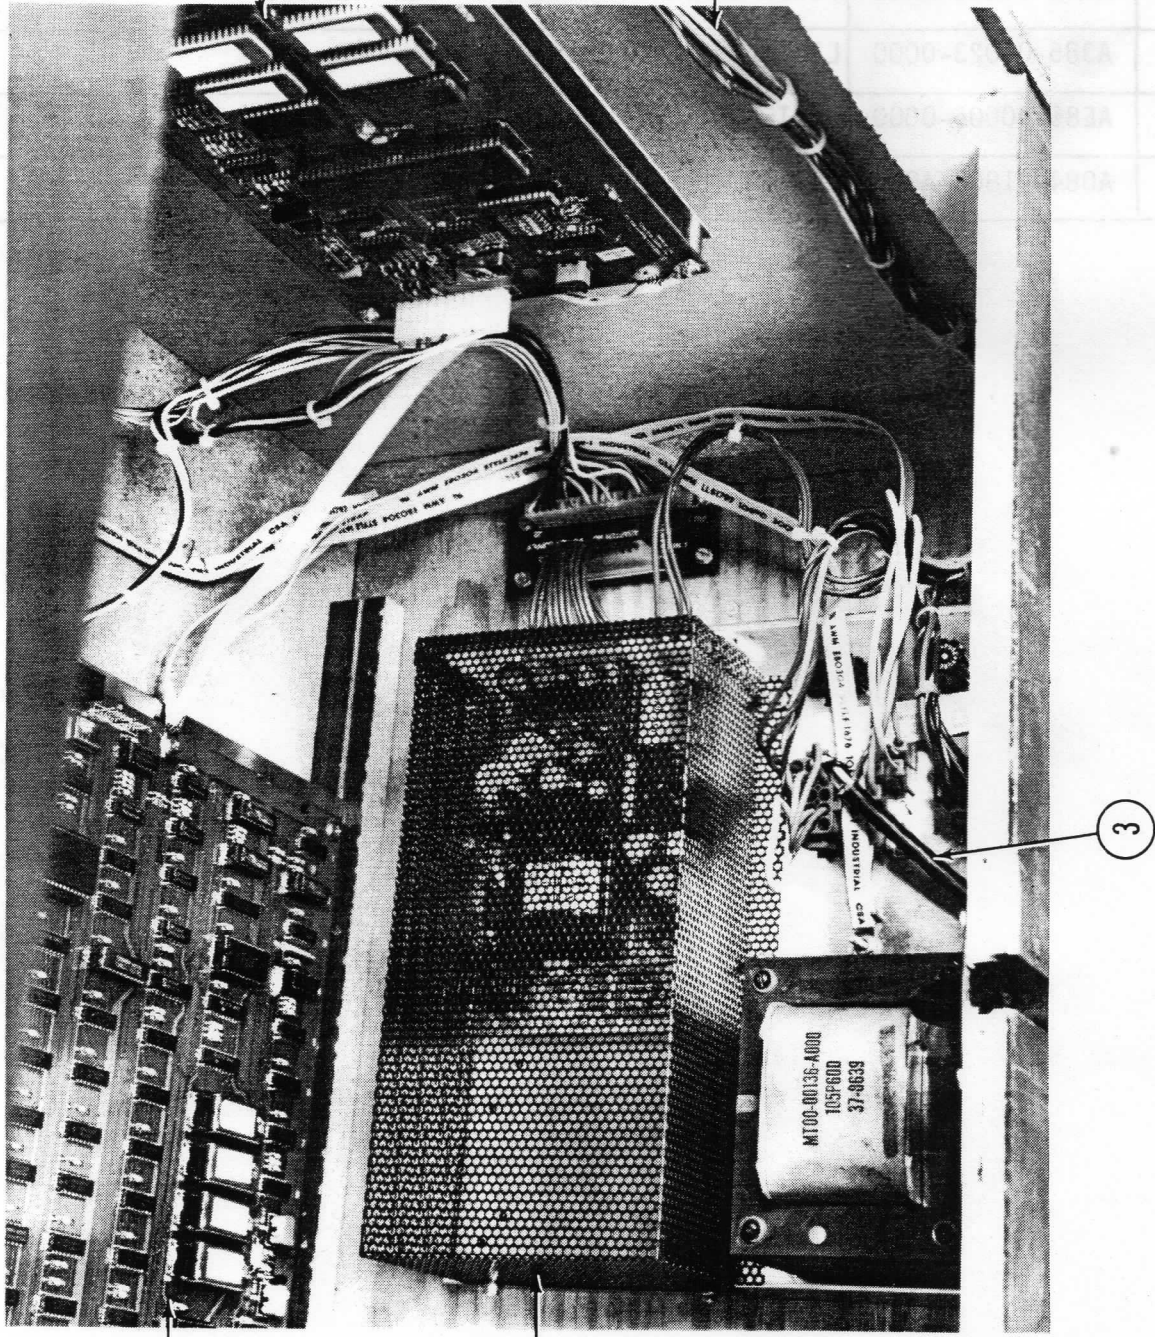


E85-OPT3-LRCLP

LOWER REAR CABINET (LOWER PORTION) PARTS LIST

ORDER BY PART NUMBER ONLY


ITEM	PART NO.	DESCRIPTION
1	A084-91871-AE85	PROGRAMMED 68000 VIDEO P.C. BOARD ASSEMBLY
2	A945-00066-0000	POWER CHASSIS ASSEMBLY - 55W FARNELL
3	A385-00023-0000	LINE CORD ASSEMBLY - U.S.A.
4	AE85-00006-0000	MASTER CABLE W/BRACKET ASSEMBLY
5	A084-91863-AE85	PROGRAMMED SOUNDS GOOD P.C. BOARD ASSEMBLY

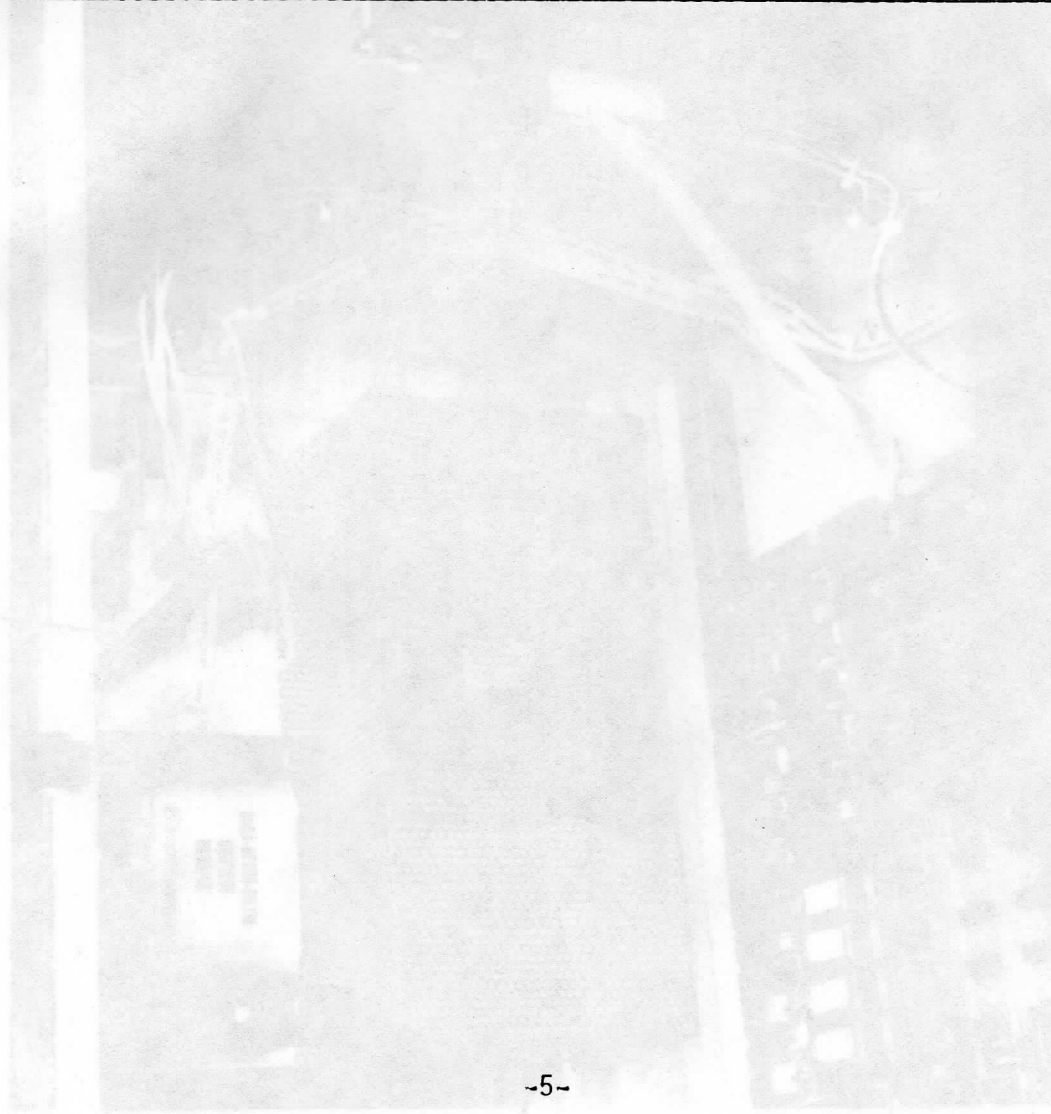

LOWER REAR CABINET (LOWER PORTION)

POWER CHASSIS ASSEMBLY - FARNELL 55W

A945-00066-0000

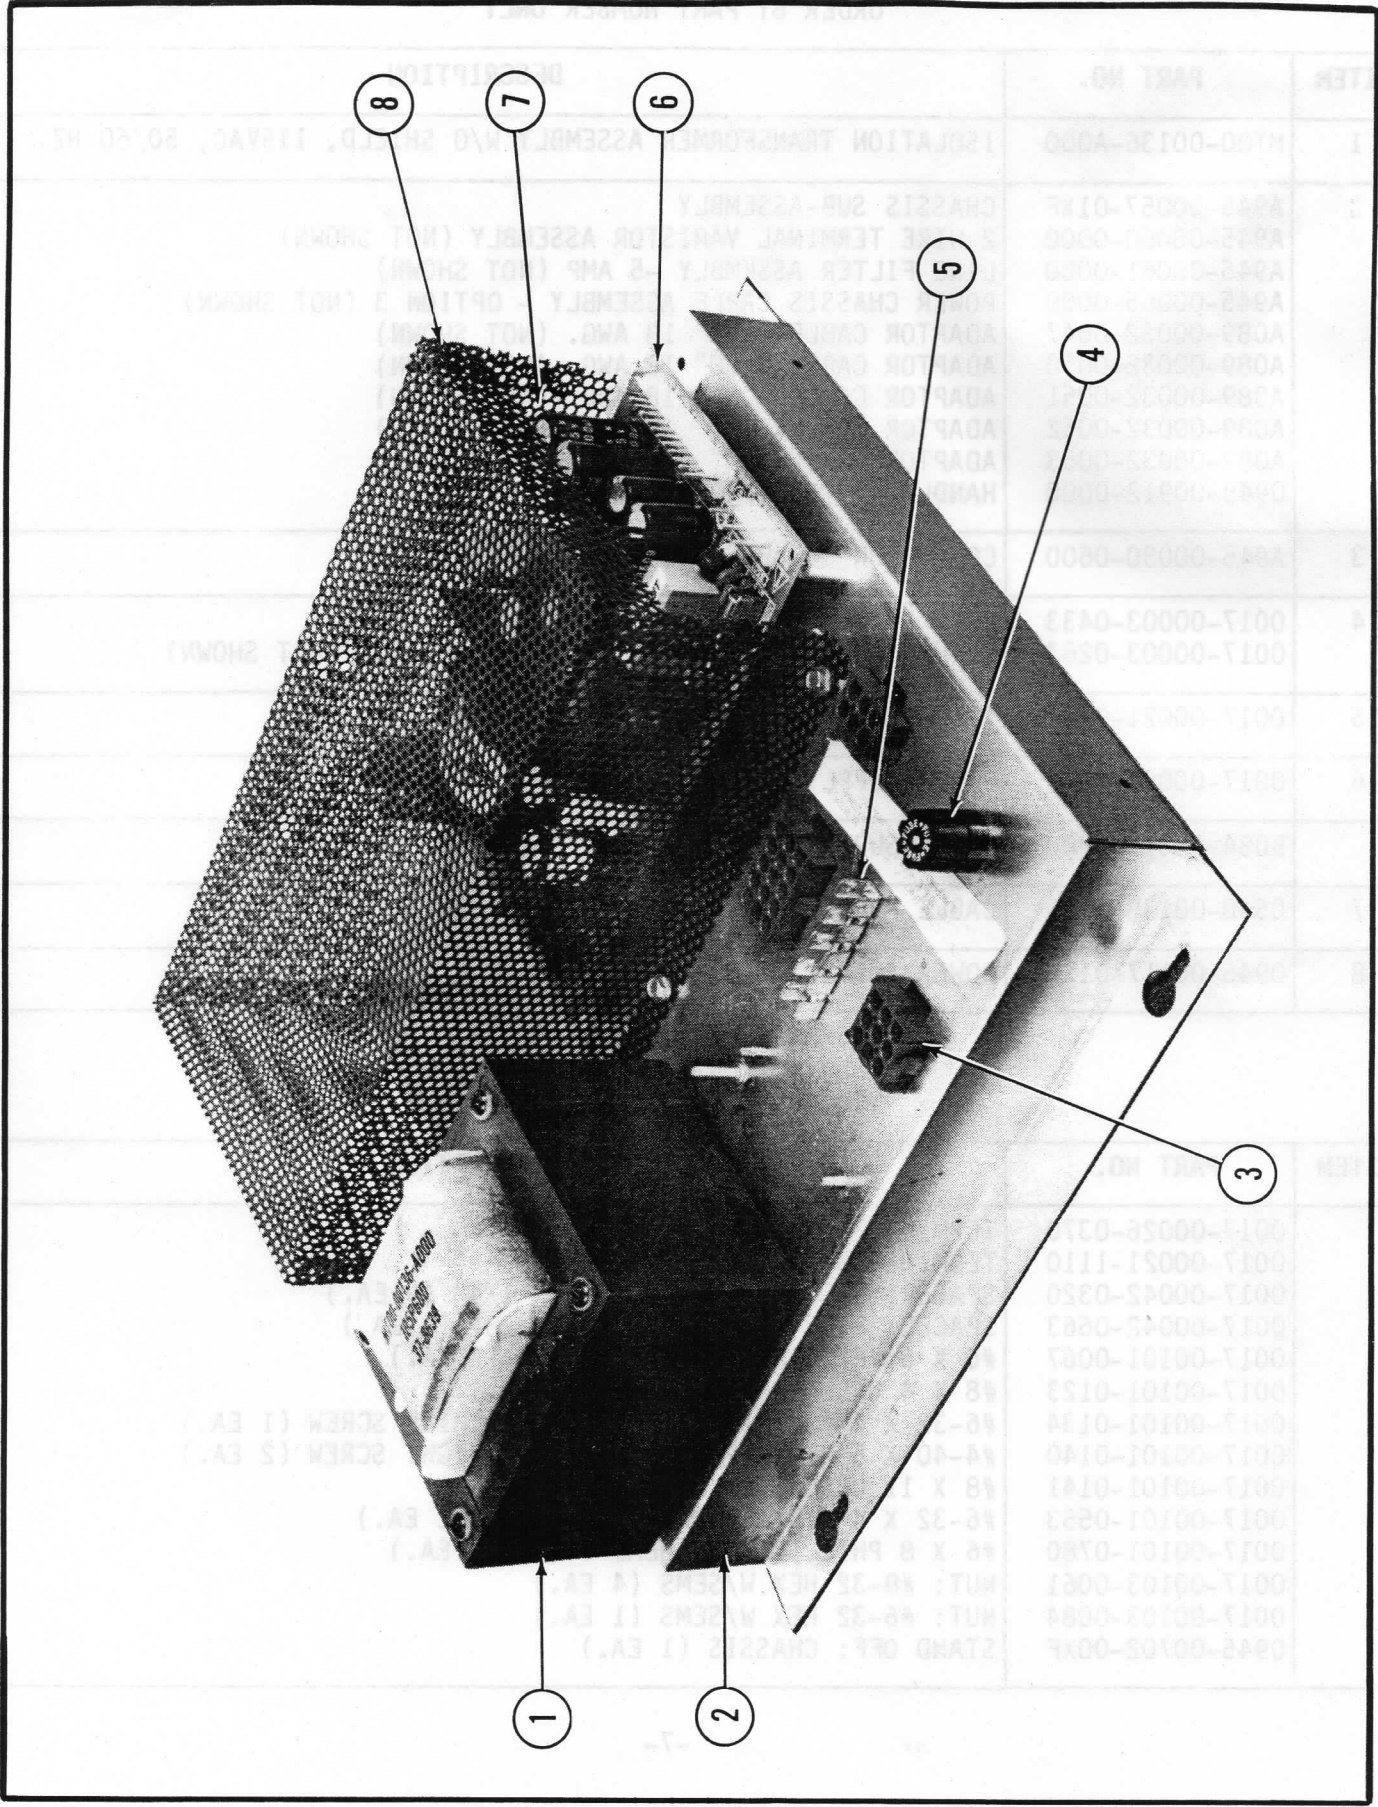

E85-OPT3-PCAF

POWER CHASSIS ASSEMBLY (FARNELL) PARTS LIST
PART NO. A945-00066-0000


ORDER BY PART NUMBER ONLY

ITEM	PART NO.	DESCRIPTION
1	MT00-00136-A000	ISOLATION TRANSFORMER ASSEMBLY W/O SHIELD, 115VAC, 50/60 HZ.
2	A945-00057-01XF A945-00060-0000 A945-00061-0000 A945-00065-0000 A089-00032-0047 A089-00032-0050 A089-00032-0051 A089-00032-0052 A089-00032-0053 0945-00912-0000	CHASSIS SUB-ASSEMBLY 2 WIRE TERMINAL VARISTOR ASSEMBLY (NOT SHOWN) LINE FILTER ASSEMBLY -5 AMP (NOT SHOWN) POWER CHASSIS CABLE ASSEMBLY - OPTION 3 (NOT SHOWN) ADAPTOR CABLE 2.50" 18 AWG. (NOT SHOWN) ADAPTOR CABLE 4.50" 18 AWG. (NOT SHOWN) ADAPTOR CABLE 5.50" 18 AWG. (NOT SHOWN) ADAPTOR CABLE 7.50" 18 AWG. (NOT SHOWN) ADAPTOR CABLE 3.0" 18 AWG. (NOT SHOWN) HANDLE 1" (NOT SHOWN)
3	A945-00030-0600	CONNECTOR & CABLE ASSEMBLY (NOT SHOWN)
4	0017-00003-0433 0017-00003-0263	FUSE HOLDER W/CAP FUSE: MDA, 3 AG., 4 AMP, 250VAC, SLO-BLO (NOT SHOWN)
5	0017-00021-0370	TERMINAL STRIP
6	0017-00003-0641	POWER SUPPLY: FARNELL 55 WATT
	B084-91876-A000	POWER SUPPLY ADAPTOR BOARD ASSEMBLY
7	0540-00138-2100	CABLE PROTECTOR: 5" (NOT SHOWN)
8	0945-00117-01XF	POWER SUPPLY P.C. BOARD COVER

ASSEMBLY MOUNTING HARDWARE

ORDER BY PART NUMBER ONLY

ITEM	PART NO.	DESCRIPTION
	0017-00026-0370	TERMINAL
	0017-00021-1110	TERMINAL STRIP
	0017-00042-0320	SPACER: SELF RETAINING - #8 X 1/4" (4 EA.)
	0017-00042-0663	SPACER: P.C. BOARD DUAL LOCK 3/8" (4 EA.)
	0017-00101-0067	#6 X 6 PHILLIPS PAN HEAD SCREW (2 EA.)
	0017-00101-0123	#8 X 4 UNSLOTTED HEX BOLT (8 EA.)
	0017-00101-0134	#6-32 X 4 PHILLIPS ROUND HEAD MACHINE SCREW (1 EA.)
	0017-00101-0140	#4-40 X 5 PHILLIPS PAN HEAD TAP TIGHT SCREW (2 EA.)
	0017-00101-0141	#8 X 11 UNSLOTTED HEX SCREW (2 EA.)
	0017-00101-0553	#6-32 X 4 SLOTTED PAN HEAD SCREW (2 EA.)
	0017-00101-0780	#6 X 8 PHILLIPS PAN HEAD SCREW (2 EA.)
	0017-00103-0061	NUT: #8-32 HEX W/SEMS (4 EA.)
	0017-00103-0084	NUT: #6-32 HEX W/SEMS (1 EA.)
	0945-00702-00XF	STAND OFF: CHASSIS (1 EA.)

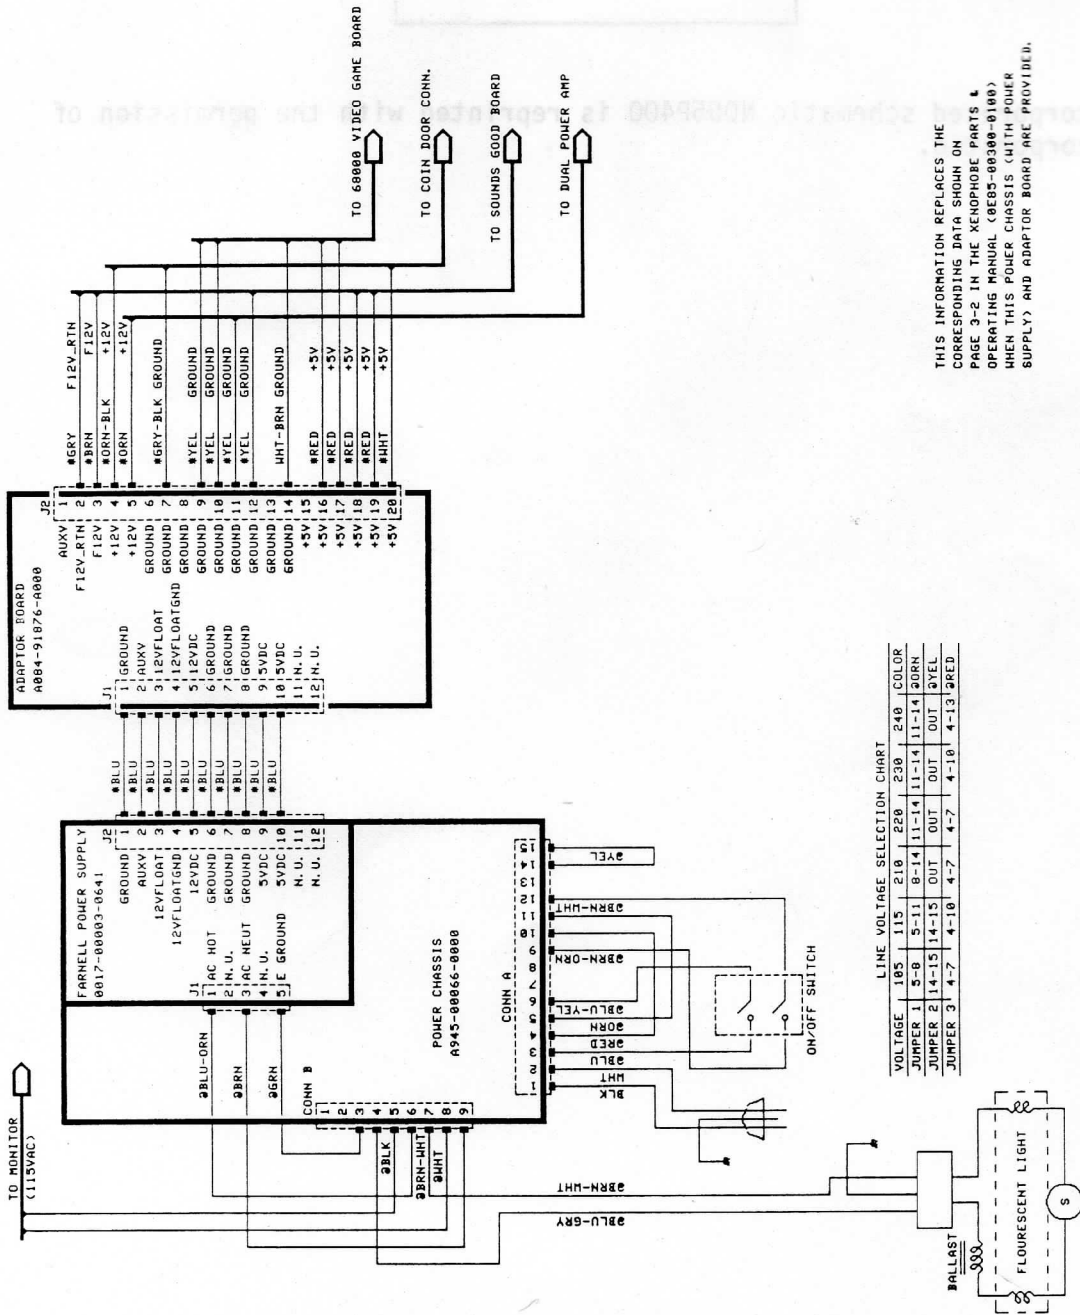

LINE VOLTAGE SELECTION CHART

VOLTAGE	105	115	210	220	230	240	COLOR
JUMPER 1	5-8	5-11	8-14	11-14	11-14	11-14	ORN
JUMPER 2	14-15	14-15	OUT	OUT	OUT	OUT	YEL
JUMPER 3	4-7	4-10	4-7	4-7	4-7	4-10	RED

NOTES:
 * = 10AHG 300V
 @ = 10AHG 600V

THIS INFORMATION REPLACES THE
 CORRESPONDING DATA SHOWN ON
 PAGE 3-2 IN THE XENOPHOB PARTS &
 OPERATING MANUAL (9855-00300-0100)
 WHEN THIS POWER CHASSIS (WITH POWER
 SUPPLY) AND ADAPTOR BOARD ARE PROVIDED.

RELEASED FOR PRODUCTION 9/28/87 D. S.
 NOTES:
 D. STERN
 9/25/87
 FARNELL POWER SUPPLY
 POWER CHASSIS ASSEMBLY
 ADAPTOR WIRING DIAGRAM
 M051-00945-0094
 SHEET 1 OF 1 REV

The FARNELL POWER SUPPLY component layout drawing is not available at this time.

The FARNELL POWER SUPPLY Parts List
is not available at this time.